

# MODEL CA6 - CHLORIDE ANALYZER

Compact online colorimeter for the automatic measurement of Chloride in water

## APPLICATION FIELDS

- Boiler feed
- Cooling water
- Drinking water
- Industrial waste water
- Surface water



## ADVANTAGES / FEATURES

### Dual compartment enclosure

To ensure complete separation between the electronics and the wet part.

### One reagent configuration, reduced running costs

Minimum operating cost, low maintenance solution.

### Wide measuring range

The determination ranges of the CA6 Chloride Analyzer vary from 0.2 to 5000 mg/L  $\text{Cl}^-$  using internal dilution module.

### Automatic calibration / validation / cleaning

Validation, cleaning and calibration are standard features which significantly reduce downtime and operator intervention ensuring the most accurate results are obtained.

Free selectable validation, cleaning and calibration intervals.

### Color touchscreen user interface

The CA6 Colorimeter is equipped with a graphic touchscreen interface showing measured values and status information. Easy access to menus and functions. Multiple languages. Integrated datalogger with USB download.


### Factory tested, ready for installation and operation

Just connect the power, sample, and reagent lines and the analyzer is fully operational.

### Multiple streams

Dual streams version available.

External Sequencer, switching up to 4 sample streams.




## MEASUREMENT PRINCIPLE

The CA6 analyzer uses an adaptation of the mercury thiocyanate method to measure chloride.

Chloride reacts with mercury thiocyanate and iron based reagents to produce an orange-brown ferric thiocyanate complex. The absorbance intensity is proportional to the chloride concentration in the sample and is measured at 470 nm.

## TECHNICAL SPECIFICATIONS

Measured parameter:	Cl <sup>-</sup> (ppb, ppm, mg/l).	Dimensions (H x W x D):	23.6 x 15.0 x 8.2 in / 606 x 380 x 209 mm
Measuring principle:	Differential photometric absorbance.	Weight:	Approx. 44 lbs (20 Kg)
Measuring range:	0.2 to 50 ppm Cl <sup>-</sup> for the 26 mm cell, 0.5 to 100 ppm Cl <sup>-</sup> for the 16 mm cell; up to 5000 ppm Cl <sup>-</sup> with internal dilution.	Power supply:	Voltage: 100 - 240 VAC 50/60 Hz standard or 24 VDC (option) Power consumption: max. 80 VA
Reproducibility:	± 0.3 ppm or ± 5%, whichever is greater up to 20 ppm; ≥ 20 up to 50 ppm: ± 0.5 ppm or ± 5%, whichever is greater (26 mm cell) ± 1 ppm or ± 5%, whichever is greater (16 mm cell).	Outputs:	2 x 4-20 mA outputs for measured data Modbus RTU RS485
Analysis frequency:	Freely programmable, batch near-continuous analysis.	Alarms:	4 SPDT programmable potential free relays
Cycle time:	6-8 minutes, including conditioning before analysis cycle and rinsing after measuring.	Digital input:	Remote start / stop
Reaction cell:	Temperature heated	Operating Temperature:	41 - 113 °F (5 - 45 °C)
Sample:	Pressure-free from overflow vessel Temperature: 41 - 122 °F (5 to 50 °C) Flow Rate: 80 to 500 mL/min Connection: 6 mm (¼-in.)	Humidity:	10 to 90% non-condensing (indoor use, outdoor installation only possible with protective cabinet or shelter not included)
Drain:	Pressure-free, atmospheric drain Connection: 12 mm (½-in.)	Installation:	Wall mount (standard), bench top support or panel mount (options).
N° of streams:	1, 2 with integrated switching valve 3, 4 with external sequencer	Ingress Protection:	IP54

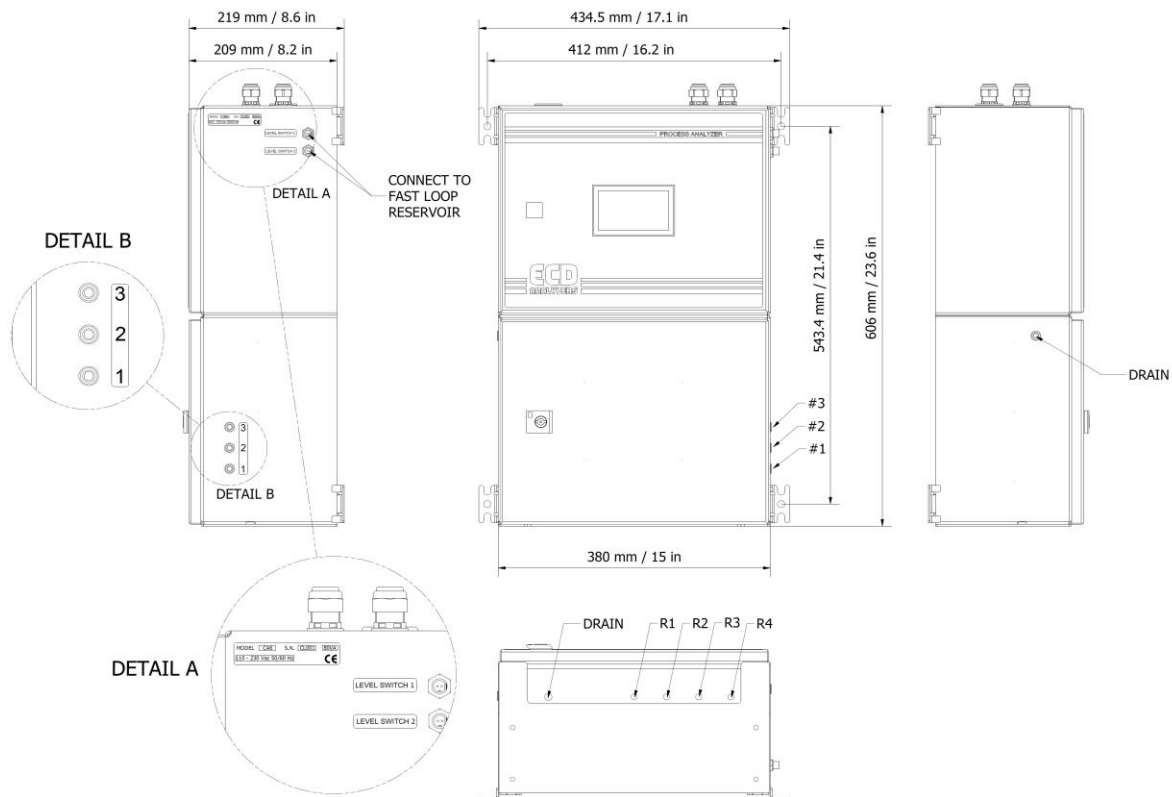

[www.ECDanalyzers.com](http://www.ECDanalyzers.com)

**ECD**  
ANALYZERS

ECD ANALYZERS, LLC 1500 N Kellogg Dr Anaheim, CA 92807 USA - Phone: +1-714-695-0051 Fax: +1-714-695-0057  
Email: [support@ECDanalyzers.com](mailto:support@ECDanalyzers.com) [www.ECDanalyzers.com](http://www.ECDanalyzers.com)